



**AMERICAN SPECIALTIES, INC.**  
441 Saw Mill River Road, Yonkers, NY 10701  
(914) 476.9000 • (914) 476.0688  
www.americanspecialties.com

**MODEL №:** 0357

**ISSUED:** 1 APR 2020

**REVISED:**

## SURFACE MOUNTED HORIZONTAL FOAM SOAP DISPENSER OWNER'S MANUAL

### INSTALLATION

Unit is surface mounted to wall or partition with a wall mounting plate (supplied) and screws (by others). Unit is secured to interlocking wedge bracket and locked in place by a locking screw (supplied) installed through hinged refill door (Fig. 1). Recommended installation for general utility is 42" [1066] AFF (Above Finished Floor) or 6" [152] min above washbasin. For compliance with 2010 ADA Accessibility Standards and ABA Standards 2015, install unit with centerline of valve button no higher than 48" [1219] AFF. Fill tank with foaming liquid soap having a pH in range  $7 \pm 1.5$  and viscosity in range 1-100 cP (mPa•s).

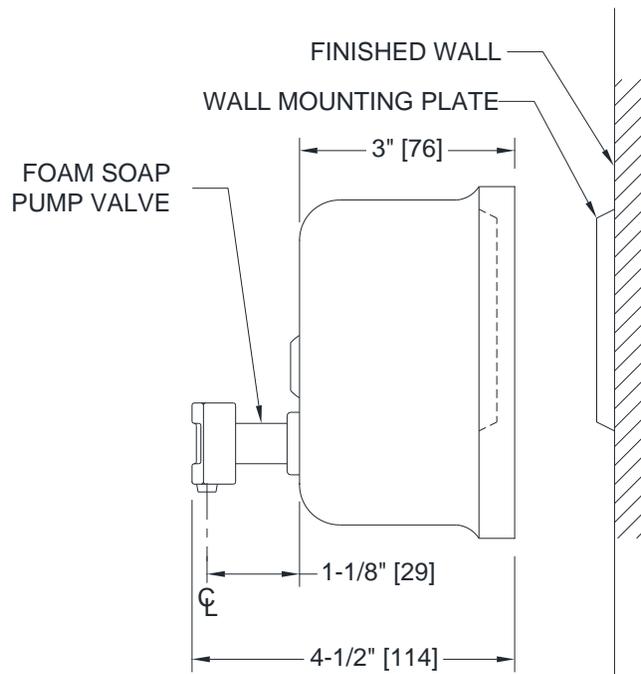


Fig. 1

### OPERATION

Push button to dispense soap. Unit is refilled through hinged door at top requiring special key (supplied) to open (Fig. 2). Soap tank will continue to feed properly until soap level is below valve intake port. Tank supply is replenished manually on cycle determined by maintenance.

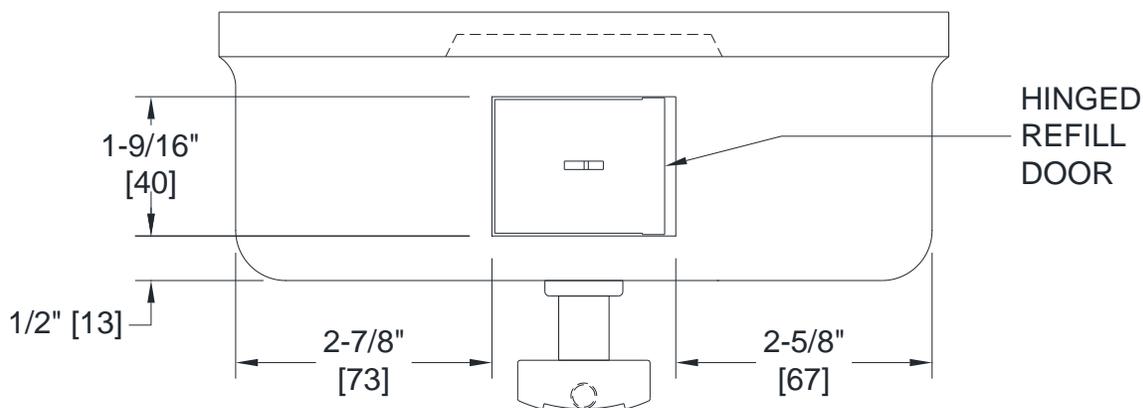


Fig. 2