


**Medicine Cabinet (18-1/4" [463] W x 24-1/4" [616] H) – Recessed - Stainless Steel**

Healthcare Accessories

MasterFormat Section 10 28 13

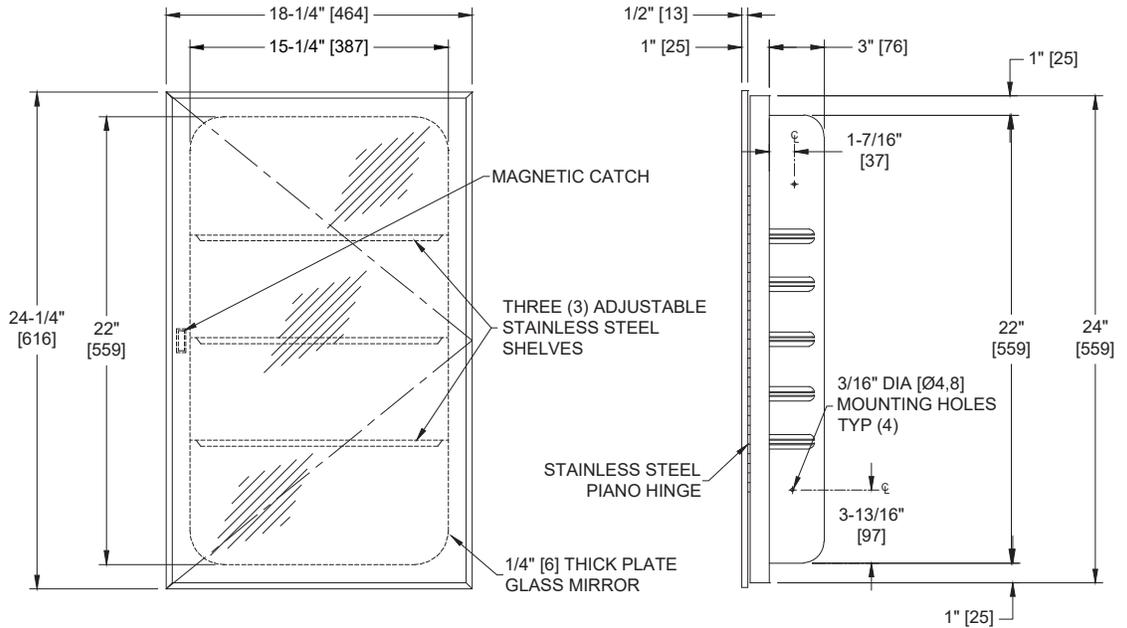

Scan for Information



**SUSTAINABILITY/LEED**

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)  
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

**NOTE:**  
ALL DIM'S INCH [MM]  
ILLUSTRATION FOR REF ONLY AND NTS  
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN  
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

**PRODUCT OVERVIEW**

Swing door mirror cabinet is type 304 stainless steel with satin finish. Mirror is 1/4" [6], guaranteed for 15 years against silver spoilage. Door has full length piano hinge and magnetic catch. Three removable stainless steel shelves. User pulls door to access contents and manually pushes door shut. Adjust shelf spacing by removing shelves and reinserting in any of five (5) internally embossed tracks on each side of cabinet interior.

**KEY FEATURES & SPECIFICATIONS**

- Swing Door Mirror Cabinet
- 22 gauge alloy 18-8 - Satin Finish
- Heavy duty stainless steel multi-staked piano hinge and shall be held closed by a magnetic catch
- Recessed
- 18-1/4" [464] W x 24-1/4" [616] H

**OPERATION & MAINTENANCE**

Pull the door to access contents and manually push door to engage magnetic catch that holds door shut. Shelf spacing may be adjusted by removing shelves and inserting in any of five (5) internally embossed tracks on each side of cabinet interior.

**TECHNICAL INFORMATION / PRODUCT PROPERTIES**

Property	Value
Dimensions	18-1/4" [464] W x 24-1/4" [616] H x 4-1/2" [114] D
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Recessed
Capacity	N/A

**INSTALLATION**

Unit is mounted in wall recess using four (4) #10 pan head self-threading screws (by others) through concealed mounting holes provided in cabinet sides. For general utility mount unit 46" [1168] Above Finished Floor (AFF) to bottom of unit or 12" [305] above wash basin. For compliance with 2010 ADA Accessibility Standards install unit so that bottom edge of mirror is 40" [1016] maximum Above Finished Floor (AFF). Note that bottom edge of reflecting surface is 3/4" [19] below Rough Wall Opening (RWO).

Rough Wall Opening (RWO) required is 16" [406] W x 22-3/4" [578] H x 3-1/2" [89] D minimum

**WARRANTY**

One (1) Year from date of Invoice