


Paper Towel Dispenser & Waste Receptacle – Counter Mounted

Paper Towel Combination Units

Traditional

MasterFormat Section 10 28 13

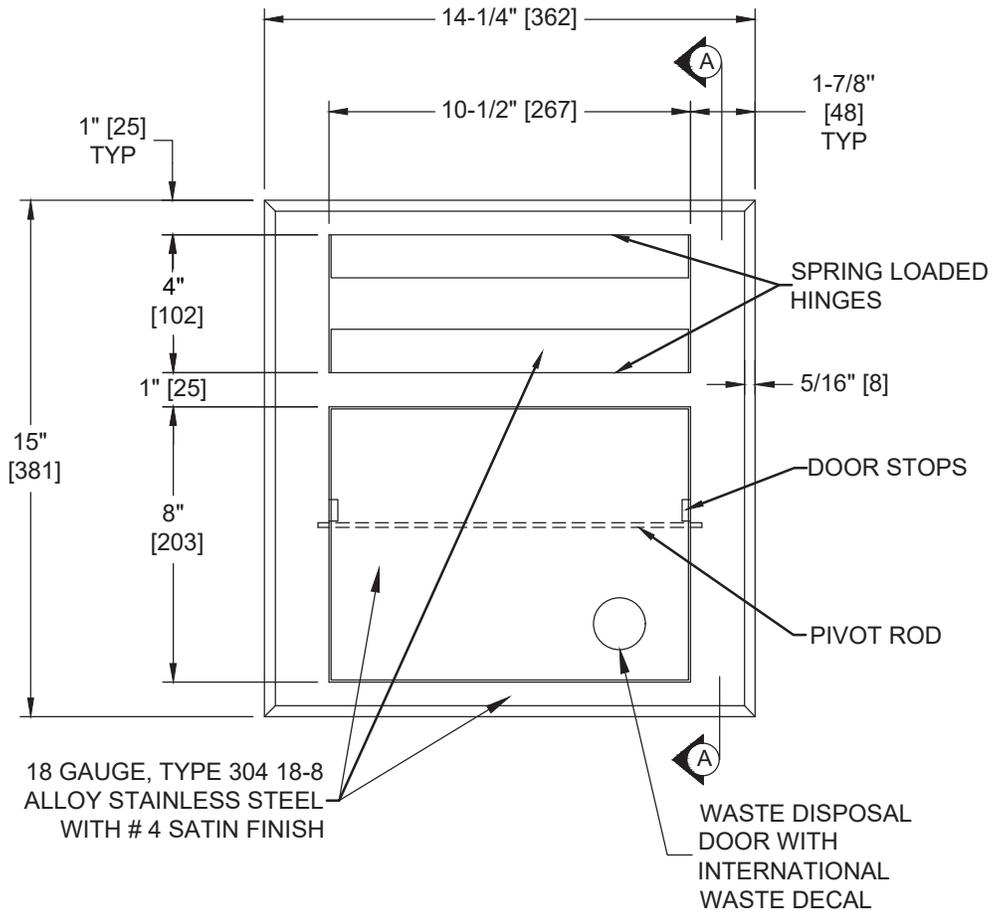

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

Scan for Information



SUSTAINABILITY/LEED

MR 4.1 (1) EQ 4.1 (1)
MR 4.2 (1) EQ 4.2 (1)
MR 6 (1) EQ 4.4 (1)

PRODUCT OVERVIEW

Holds and dispenses one (1) package of C-fold paper towels. Paper towels are dispensed manually through flap doors until supply is depleted. A spring actuated towel carrier mechanism maintains towel dispensing pressure. Dispenser is refilled by pushing paper towels downward through flap doors. Loose waste receptacle to be placed directly below waste door on the vanity floor is provided. 7.5 gal. (28 L) waste receptacle capacity.

KEY FEATURES & SPECIFICATIONS

- 22 gauge Type 304 Stainless Steel - Satin Finish
- Counter Mounted
- Flap doors have rolled edges mounted with heavy duty spring loaded hinges
- 600 C-Fold or 800 Multi-Fold OR 1100 Single-Fold / 7.5 Gal. (28.0 L) Waste Capacity

OPERATION & MAINTENANCE

Waste is inserted through swinging door by downward pressure. When pressure is released the waste door returns to its closed position. Paper towels are dispensed manually through flap doors. A spring actuated towel carrier mechanism maintains constant towel dispensing pressure. Dispenser is refilled by pushing paper towels downward through flap doors. Waste can, is manually emptied on a cycle determined by maintenance needs.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	14-1/4" [362] W x 15" [381] H x 3/32" [2] D
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Vanity/Counter Mount
Capacity	600 C-Fold or 800 Multi-Fold OR 1100 Single-Fold / 7.5 Gal. (28.0 L) Waste Capacity

INSTALLATION

Position unit into appropriate counter top cutout (by others). Installer to bend mounting straps upward to suit counter top thickness. Secure mounting straps to underside of counter-top with mounting screws (by others).

CounterTop Opening (CTO) required is 12-1/2" [318] W x 13-1/2" [343] L

WARRANTY

One (1) Year from date of Invoice