


Waste Receptacle – Counter Mounted

Waste Receptacles

MasterFormat Section 10 28 13

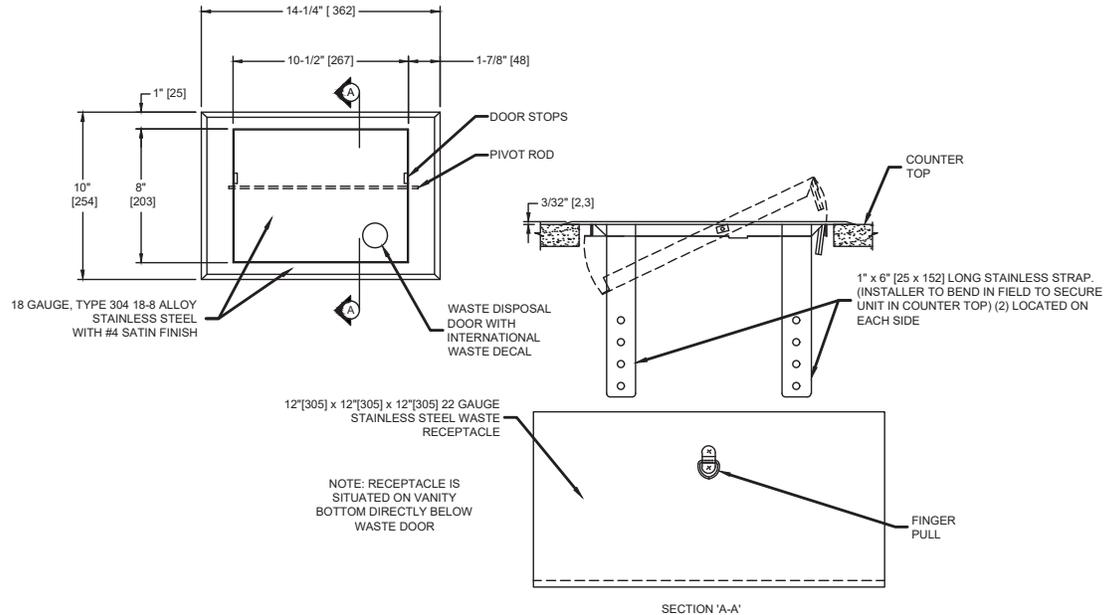

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

Scan for Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

PRODUCT OVERVIEW

For counter top installation. Holds 1cu.ft. (28 liters) of solid waste into loose waste can. Waste is inserted through the swinging door by downward pressure. When pressure is released the waste door returns to its closed position. Door and face trim shall be fabricated of 18 gauge alloy 18-8 type 304 stainless steel. Waste receptacle shall be provided loose and shall be all welded construction fabricated of corrosion protected 22 gauge steel.

KEY FEATURES & SPECIFICATIONS

- Self closing spring loaded waste door
- Type 304 Stainless Steel - Satin Finish
- Counter Mounted
- Holds 1cu.ft. (28.0 L) of solid waste into loose waste can

OPERATION & MAINTENANCE

Waste is inserted through the swinging door by downward pressure. When pressure is released the waste door returns to its closed position. Waste can is manually emptied on a cycle determined by maintenance needs.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	14-1/4" [362] W x 10" [254] H x 3/32" [2] D
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Vanity/Counter Mount
Capacity	Holds 1cu.ft. (28.0 L) of solid waste into loose waste can

INSTALLATION

Position unit into appropriate counter top cutout (by others). Installer to bend mounting straps upward to suit counter top thickness. Secure mounting straps to underside of counter top with mounting screws (by others).

CounterTop Opening (CTO) Required is 8-3/4" [222] x 12-1/2" [318]

OPTIONS

N/A

WARRANTY

One (1) Year from date of Invoice