
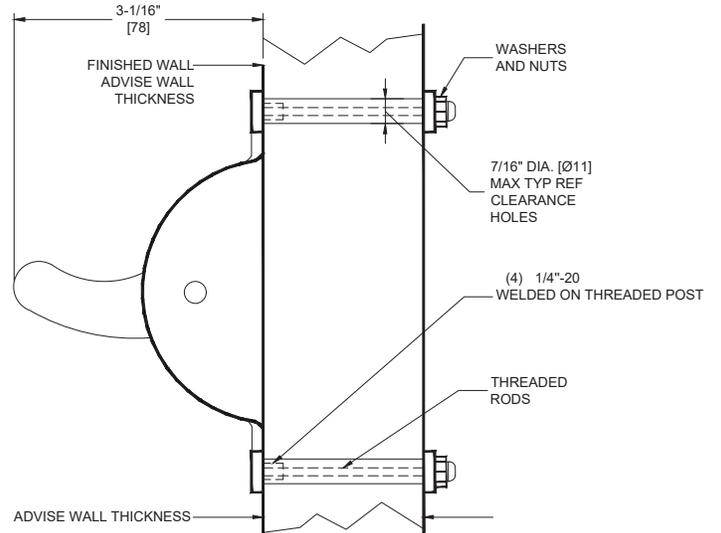


**Clothes Hook – Chase Mount**

Security Accessories

MasterFormat Section 10 28 13

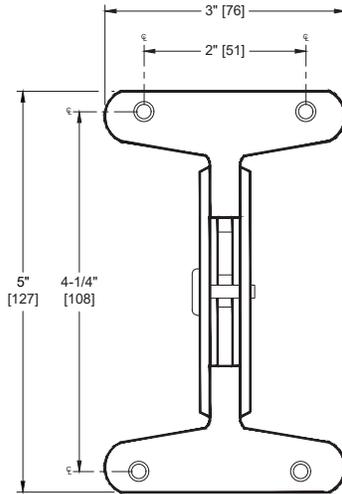

Scan for Information



**SUSTAINABILITY/LEED**

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)  
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

**NOTE:**  
ALL DIM'S INCH [MM]  
ILLUSTRATION FOR REF ONLY AND NTS

**PRODUCT OVERVIEW**

Bracket 11 gauge, hook 7 gauge type 304 stainless steel with satin finish. If hook is excessively loaded, it will snap down for safety. Wall plate includes four (4) welded-on rear-mounted posts.

**KEY FEATURES & SPECIFICATIONS**

- Built for high security environments
- Type 304 Stainless Steel - Satin Finish
- 7 gauge hook
- Chase (Rear) Mount
- Anti-Ligature Snap Down Hook
- 11 gauge bracket

**OPERATION & MAINTENANCE**

Clothes hook will release down when overloaded beyond the 35 lb (16 kg) limit. Hook tension may be adjusted to maintain trip threshold over the life of the product.

**TECHNICAL INFORMATION / PRODUCT PROPERTIES**

Property	Value
Dimensions	3" [76] W x 5" [127] H x 3-1/16" [78] D
Construction	Type 304 Stainless Steel - Satin Finish 7 gauge Anti-Ligature Snap Down Hook
Mounting	Chase (Rear) Mount
Capacity	

**INSTALLATION**

Unit is rear mounted to wall or partition using four (4) 1/4-20 threaded studs, washers and nuts (supplied). For compliance with 2010 ADA Accessibility Standards, unit should be installed so that center line of the hook is 54" [1372] maximum Above Finished Floor (AFF) when clear floor side reach access is provided, or 48" [1219] maximum Above Finished Floor (AFF) if clear floor forward reach access is provided. Unit is supplied as standard with threaded studs suitable for mounting on walls up to 6" [152] thick. Other wall thickness over 6" [152] must be specified in chart for fabrication of adequate length studs.

**ADDITIONAL INFORMATION**

Wall Thickness:  
 Up to 6" [152]  
 8" [203]  
 Over 8" [203]  
 Specify W = \_\_\_\_\_ Inches

**WARRANTY**

One (1) Year from date of Invoice