
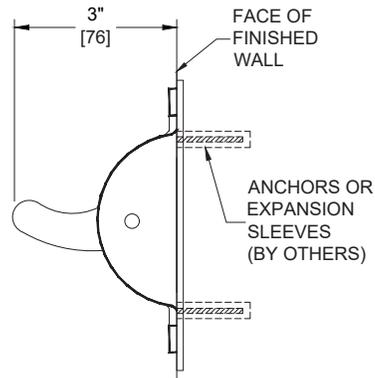


Clothes Hook Strip – Front Mounting

Security Accessories

MasterFormat Section 10 28 13

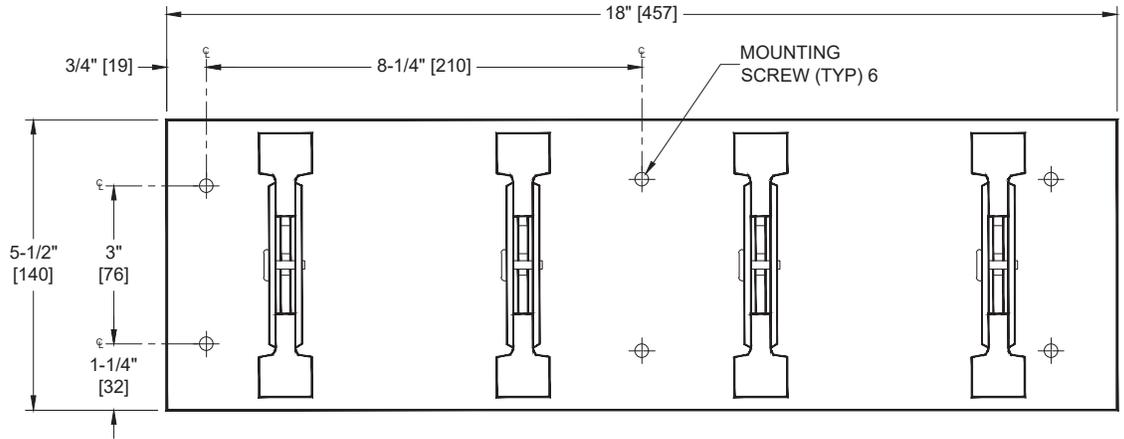

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

Scan for Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

PRODUCT OVERVIEW

Fabricated of type 304 stainless steel alloy 18-8. Hooks are 7 gauge, brackets are 11 gauge and wall plate is 14 gauge. Safety hook tension is adjustable by means of a captive round head stainless steel spanner screw. Hooks smoothly drop down when load exceeds 35 lb (16 kg) limit when correctly set. Hook geometry and bracket prevents hooks from being set in vertical-up position. Wall plate includes six (6) mounting holes for 1/4-20 button head pin-Torx[®] machine screws (supplied).

KEY FEATURES & SPECIFICATIONS

- Built for high security environments
- Type 304 Stainless Steel - Satin Finish
- Front Mount
- Anti-Ligature Snap Down Hook
- 14 gauge wall plate

OPERATION & MAINTENANCE

Clothes/towel hooks will release down when overloaded beyond the 35 lb (16 kg) limit. Hook tension may be adjusted to maintain trip threshold over the life of the product.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	18" [457] W x 5-1/2" [140] H x 3" [76] D
Construction	Type 304 Stainless Steel - Satin Finish Anti-Ligature Snap Down Hook
Mounting	Front Mount
Capacity	

INSTALLATION

Unit is front mounted to wall or partition using six (6) 1/4-20 x 2" [M6x50] button head pin-Torx® machine screws (supplied) into suitable anchors (by others) or alternate wall preparation (by others). Anchors to be supplied by installer to suit wall condition. For compliance with 2010 ADA Accessibility Standards, install unit so the top of the hooks are 48" [1219] maximum Above Finished Floor (AFF).

ADDITIONAL INFORMATION

N/A

WARRANTY

One (1) Year from date of Invoice