
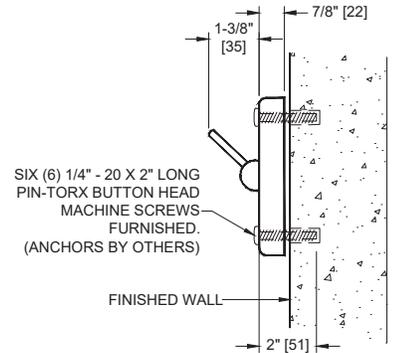


Clothes Hook Strip – Front Mount

Security Accessories

MasterFormat Section 10 28 13

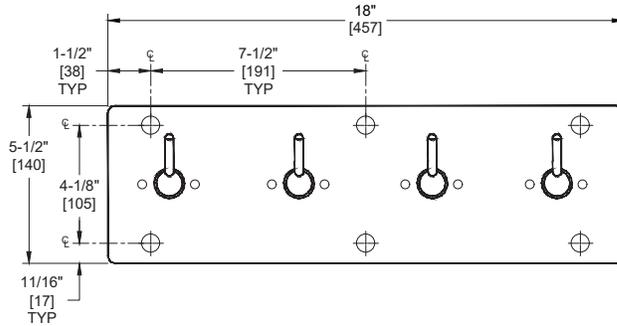

Scan for Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Fabricated of type 304 stainless steel alloy 18-8. Back plate is 14 gauge. Clothes hooks will be solid bar 3/8" [9] diameter of one-piece construction with 1" [25] diameter swivel trip-ball. Safety hooks snap down when load exceeds 35 lb (16 kg) limit. Trip-ball socket housing prevents hooks from being set in vertical-up position. The unit is provided with six (6) clear mounting holes that shall accept 1/4"-20 x 2" long [M6x51] stainless steel pin-Torx® button head machine screws (supplied).

KEY FEATURES & SPECIFICATIONS

- Built for high security environments
- Type 304 Stainless Steel - Satin Finish
- Front Mount
- Anti-Ligature Snap Down Hook
- 14 gauge wall plate

OPERATION & MAINTENANCE

Clothes/Towel hooks are tensioned to release down when overloaded beyond the 35 lb (16 kg) limit.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	18" [457] W x 5-1/2" [140] H x 2-1/4" [57] D
Construction	Type 304 Stainless Steel - Satin Finish Anti-Ligature Snap Down Hook
Mounting	Front Mount
Capacity	

INSTALLATION

For compliance with 2010 ADA Accessibility Standards, install unit so that tops of hooks are no more than 48" [1219] maximum Above Finished Floor (AFF). Surface mount unit on finished wall with six (6) 1/4"-20 x 2" long [M6x51] pin-Torx® button head machine screws (supplied) into wall anchors (by others) through mounting holes provided.

ADDITIONAL INFORMATION

N/A

WARRANTY

One (1) Year from date of Invoice