
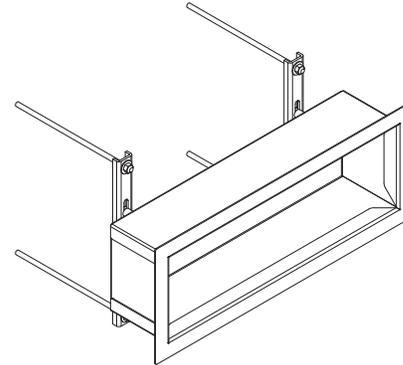


Recessed Shelves – Chase Mount

Security Accessories

MasterFormat Section 10 28 13

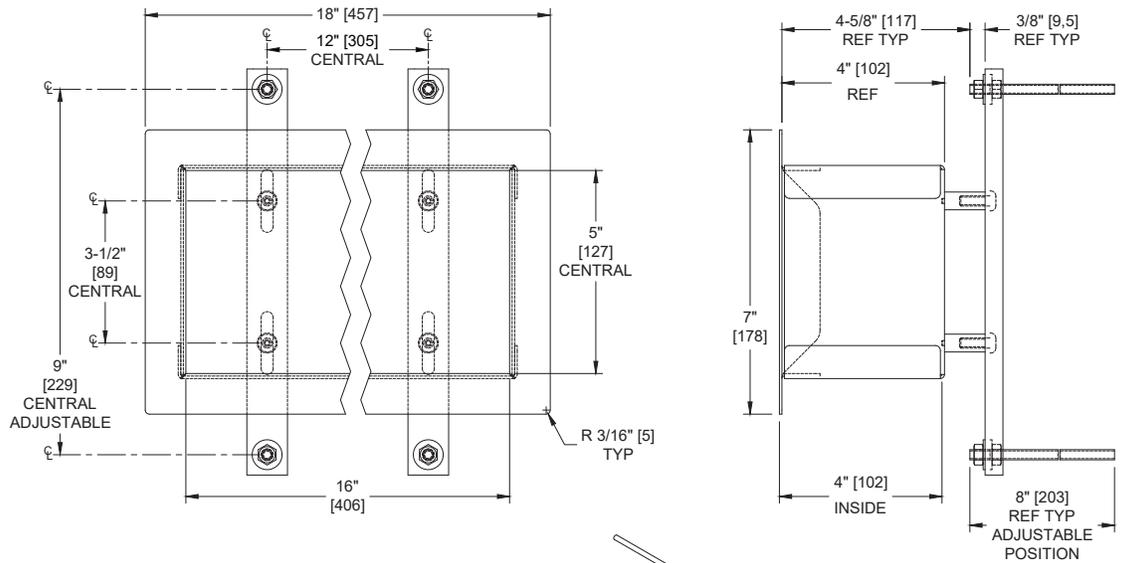

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

Scan for Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

PRODUCT OVERVIEW

Shelf 16 gauge type 304 stainless steel, corners welded and ground smooth. 1" [25] wide beveled. All exposed surfaces shall have satin finish. Unit has four studs welded on back for rear mounting. Back plates shall have two (2) holes and two (2) slots on each bracket to accommodate 1/4-20 x 1" long Philips pan head screws (provided) or to receive four (4) threaded rods 8" [203] long (provided) to be cut to suit at installation. Four (4) adjustment locking washers and nuts are provided.

KEY FEATURES & SPECIFICATIONS

- Built for high security environments
- Type 304 Stainless Steel - Satin Finish
- Back of shelf shall have four (4) welded-on anchor nuts that hold threaded rods. Back plates shall be 11 gage die-formed galvanized steel and shall be reversible for shallow or deep wall installation.
- Recessed - Chase (Rear) Mount

OPERATION & MAINTENANCE

Various items can be stored in the 4" [102] deep interior of the shelf.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	18" [457] W x 7" [178] H x 4" [102] H
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Recessed - Chase (Rear) Mount

INSTALLATION

For compliance with 2010 ADA Accessibility Standards, install unit so that shelf top is 48" [1219] maximum Above Finished Floor. For general utility mount unit 42" [1067] AFF or 18" [457] above wash basin. Mount unit through wall opening and secure to finished wall by adjusting threaded rods (supplied) to accommodate wall thickness. The length of the threaded rods is determined by the thickness of the wall on which the shelf is mounted. Rough Wall Opening (RWO) required is 16-1/2" [419] W x 5-1/2" [140] H Minimum.

SCHEDULE OF AVAILABILITY

No Options Available Up to 4-3/4" [120]

WARRANTY

One (1) Year from date of Invoice