


Roval™ Surface Mounted Sanitary Waste Receptacle

Feminine Hygiene Vendors and Disposals

Roval

MasterFormat Section 10 28 13

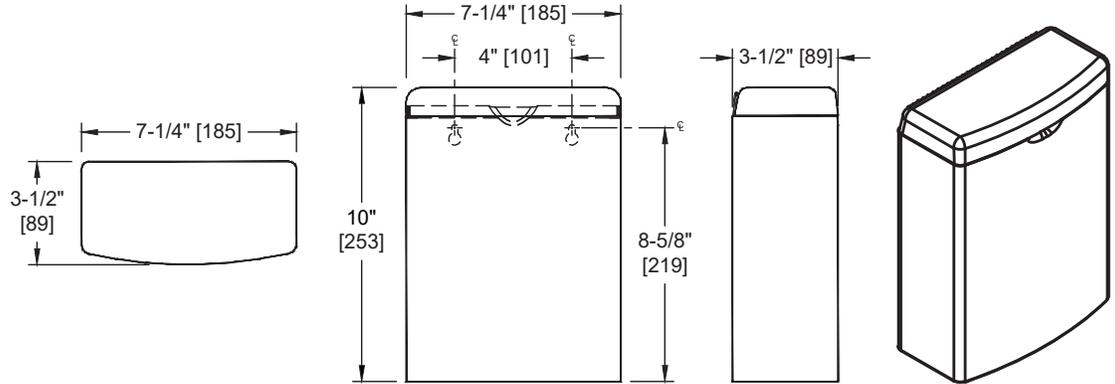

Scan for Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Cabinet front is formed seamless and capacity of the unit is 1 gal. (3.8 L). Unit is 22 gauge type 304 stainless steel alloy 18-8 with satin finish. Receptacle full top edge is hemmed with return to inside for user and service safety. Receptacle is screw-mounted to wall or partition through concealed keyhole slots provided through rear panel. User lifts lid to deposit waste material. Unload unit by either removing the disposable wax paper liner bag (by others) or unhooking the unit from the mounting screws and inverting to empty into appropriate bulk collection container. Unit shall be fabricated of 22 gauge type 304 stainless steel alloy 18-8.

KEY FEATURES & SPECIFICATIONS

- Curved front adds strength and elegance
- Concealed, Multi-Staked Piano Hinge - Removable Waste Can
- Type 304 Stainless Steel - Satin Finish
- Surface Mounted
- 1.0 Gal. (3.7 L) Waste Capacity

OPERATION & MAINTENANCE

User lifts lid to deposit waste material. Maintenance schedule determines trash removal cycle. Unload unit by either removing the disposable wax paper liner bag (by others) or unhooking the unit from the mounting screws and inverting to empty into appropriate bulk collection container.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

| Property | Value |
|--------------|--|
| Dimensions | 7-1/4" [185] W x 3-1/2" [89] D x 10" [253] H |
| Construction | Type 304 Stainless Steel - Satin Finish |
| Mounting | Surface Mounted |
| Capacity | 1.0 Gal. (3.7 L) Waste Capacity |

INSTALLATION

For general utility mount the receptacle 28" [711] to 40" [1016] above finished floor (AFF) from top of unit. For compliance with 2010 ADA Accessibility Standards install unit so that top cover is no higher than 48" [1219] above finished floor. Hang unit on wall with two (2) pre-installed #10 x 1-1/4" (32) self-threading pan head screws (by others) through the mounting keyhole slots provided into suitable wall reinforcements (by others) or two (2) pre-installed #10 x 3/4" [19] self-threading pan head screws (by others) through the mounting keyhole slots provided into metal partition.

WARRANTY

One (1) Year from date of Invoice