


Simplicity Collection Roll Towel Dispenser & Waste Receptacle – Semi-Recessed

Paper Towel Combination Units

Simplicity

MasterFormat Section 10 28 13

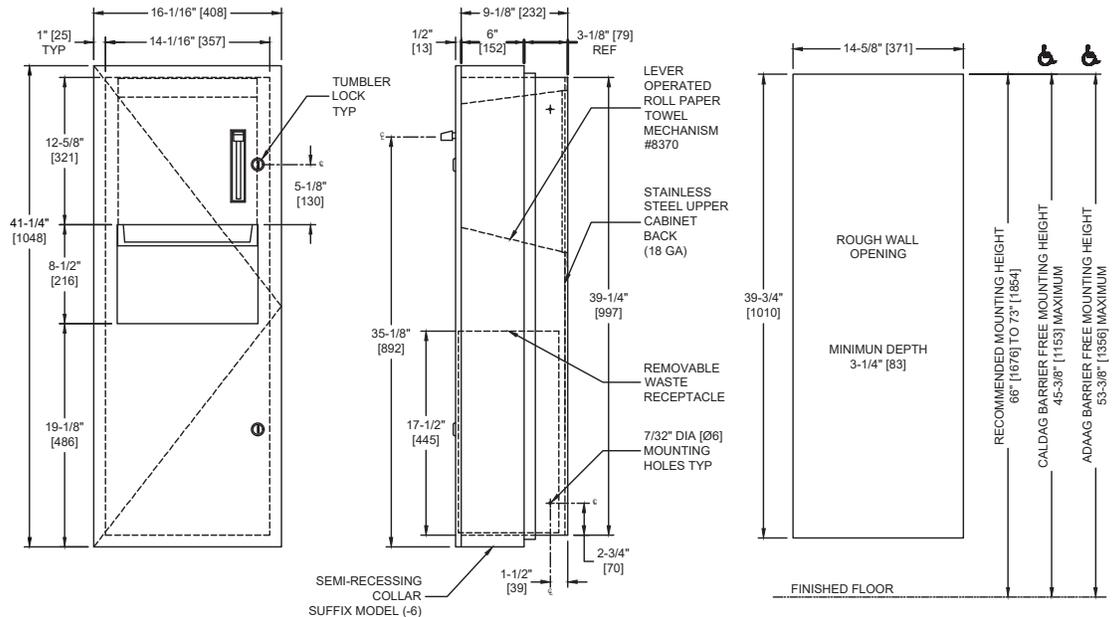

Scan for Information



SUSTAINABILITY/LEED

MR 4.1 (1) EQ 4.1 (1)
MR 4.2 (1) EQ 4.2 (1)
MR 6 (1) EQ 4.4 (1)

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

Mechanically dispenses 8" [205] or 9" [230] wide standard towel roll up to 800 ft. (244m) long and has stub roll capability for continuous dispensing. Stainless steel disposal with 9.4 gal. (36 liters) capacity. Semi-recessed with stainless steel collar. Towels are fed by lever action. Towel feed length is adjustable for economy by pin (supplied) limiting of lever stroke length. Unit may be reloaded with a full roll to automatically start when finished with an existing partial roll and will continue to feed properly when reloaded with a full roll and partial roll is transferred to stub roll position. Refill dispenser by unlocking door and replacing towel roll for an empty or partially empty unit. Locking full-face door over compartments prevents unauthorized access or removal.

KEY FEATURES & SPECIFICATIONS

- Seamless construction, crisp lines and minimalistic design
- Auto-Feed Dual Paper Towel Dispenser
- Type 304 Stainless Steel - Satin Finish
- Concealed multi-staked hinge - 3/16" diameter [Ø5]
- Semi-Recessed - w/ -6 collar
- Manual - Lever Type Dispenser - MECHANISM ONLY
- Roll Towels - up to 800 ft. [244M] Length / 9.4 Gal. (36 L) Waste Capacity

OPERATION & MAINTENANCE

Towels are fed by lever action. Towel feed length is adjustable for economy by pin (supplied) limiting of lever stroke length. Unit may be reloaded with a full roll to automatically start when finished with an existing partial roll and will continue to feed properly when reloaded with a full roll and partial roll is transferred to stub roll position. Refill dispenser by unlocking door and replacing towel roll for an empty or partially empty unit. Dispenser supply is replenished and waste container is emptied manually on cycles determined by maintenance needs. Locking full-face door over compartments prevents unauthorized access or removal.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	16-1/16" [408] W x 41-1/4" [1048] H x 9-5/8" [245] D
Construction	Type 304 Stainless Steel - Satin Finish Concealed multi-staked hinge - 3/16" diameter [Ø5] Manual - Lever Type Dispenser - MECHANISM ONLY
Mounting	Semi-Recessed - w/6" collar
Capacity	Roll Towels - up to 800 ft. Length / 9.4 Gal. (36 L) Waste Capacity

INSTALLATION

Install unit in wall recess with #10 self-threading screws (by others) through concealed mounting holes provided. Note that top of Rough Wall Opening (RWO) is 3/4" [19] below top of unit. For compliance with 2010 ADA Accessibility Standards, install unit so that towel dispenser feed lever is 48" [1219] maximum Above Finish Floor (AFF). SR collar is installed on cabinet prior to mounting in wall recess following procedure described on SR Collar Data Sheet.

RWO required is 14-5/8" [371] W x 39-3/4" [1010] H x 3-1/4" [83] D minimum

WARRANTY

One (1) Year from date of Invoice