
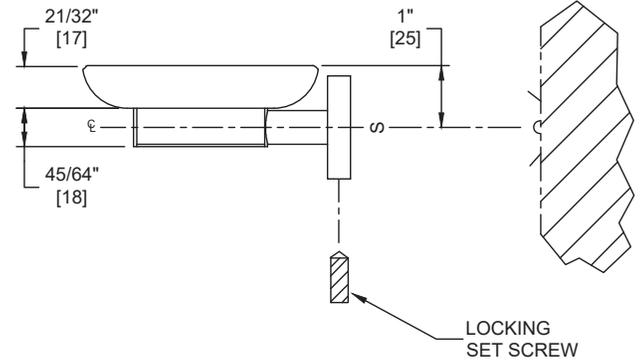
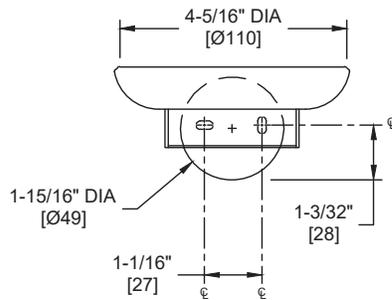




Surface Mounted Soap Dish with Glass Holder

Shower/Tub Accessories

MasterFormat Section 10 28 13

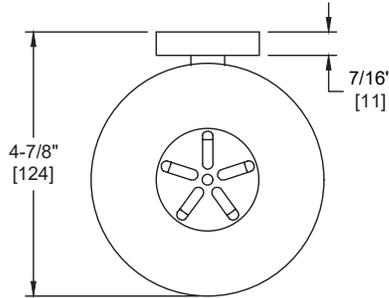

Scan for Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Clear glass holder has raised ribs to elevate soap slightly above surface to promote drying. May be removed for cleaning. All other parts of the unit are fabricated of satin finish stainless steel.

KEY FEATURES & SPECIFICATIONS

- Clear Glass holder has raised ribs to promote drying
- Type 304 Stainless Steel - Bright Finish
- Surface Mounted

OPERATION & MAINTENANCE

Soap dish has raised ribs to elevate soap slightly above dish surface to promote drying. Dish may be removed to allow cleaning between soap changes.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	4-4/16" Dia. [Ø110] x 4-7/8" [124]
Construction	Type 304 Stainless Steel - Bright Finish
Mounting	Surface Mounted
Materials	<p>Type 304 stainless steel alloy 18-8 holder. One piece molded clear glass holder.</p> <p>22 gauge post 18 gauge threaded bracket</p> <p>16 gauge support ring 18 gauge wall bracket</p>

INSTALLATION

Surface mount unit to finished wall with two (2) M4 x 39 (#6 x 1-1/2") pan head self-threading screws (provided) through holes provided in wall bracket into plastic wall anchors (provided) or other suitably prepared mountings (by others) or other suitable mounting hardware (by others) to suit wall conditions. Clip flange onto wall bracket and tighten setscrew to lock it in place. For compliance with 2010 ADA Accessibility Standards install unit with top of soap dish 48" [1219] maximum above finished floor (MAX AFF) if clear floor reach access is provided or 46" [1168] MAX AFF if side reach access over an obstruction (e.g. vanity) with reach depth greater than 10" [254] and less than 25" [635] is only provided or 44" [1118] MAX AFF if forward reach over an obstruction with reach depth greater than 20" [508] and less than 25" [635] is only provided. For general utility mount unit with top of soap dish 8" to 12" [203 to 305] above vanity basin.

ADDITIONAL INFORMATION
WARRANTY

One (1) Year from date of Invoice