


**Profile™ Collection Paper Towel Dispenser – Recessed**

Paper Towel Dispensers

Profile

MasterFormat Section 10 28 13

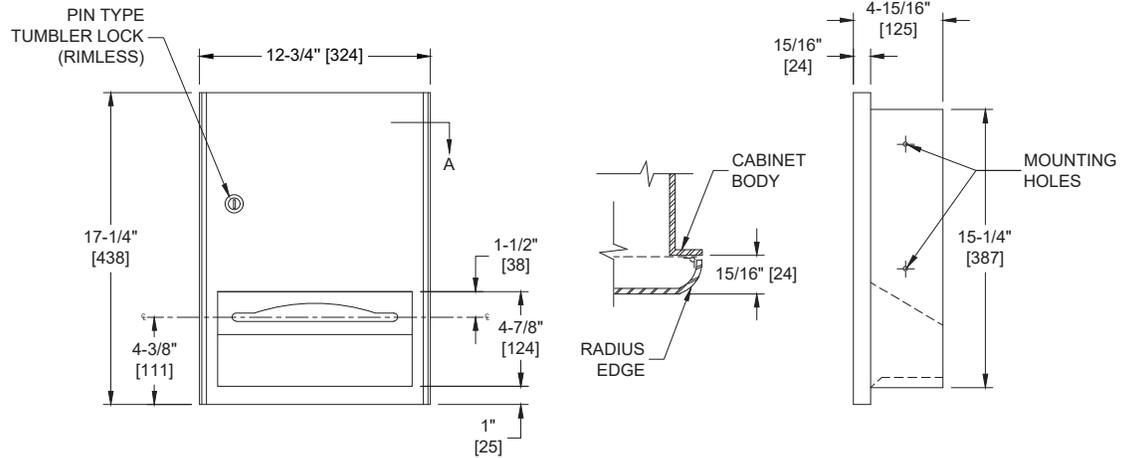

Scan for Information



**SUSTAINABILITY/LEED**

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)  
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

**NOTE:**  
ALL DIM'S INCH [MM]  
ILLUSTRATION FOR REF ONLY AND NTS  
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN  
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

**PRODUCT OVERVIEW**

Dispenses 350 C-fold or 475 multi-fold paper towels. Towels are self-feeding until supply is depleted. Unit may be reloaded with a partial load in-place and will continue to feed properly. Door held closed with a rimless tumbler lock.

**KEY FEATURES & SPECIFICATIONS**

- Robust 16 gauge Stainless Steel face
- Curved (radius) edges add elegance
- Type 304 Stainless Steel - Satin Finish
- Recessed
- 3/16" CONCEALED piano hinge adds durability
- 350 C-Fold OR 475 Multi-Fold paper towels

**OPERATION & MAINTENANCE**

Towels are self-feeding until supply is depleted. Unit may be reloaded with a partial load in-place and will continue to feed properly.

**TECHNICAL INFORMATION / PRODUCT PROPERTIES**

Property	Value
Dimensions	12-3/4" [324] x 17-1/4" [438] x 4-15/16" [125] D
Construction	Type 304 Stainless Steel - Satin Finish 3/16" CONCEALED piano hinge adds durability
Power	N/A
Operation	Manual
Mounting	Recessed
Capacity	350 C-Fold OR 475 Multi-Fold paper towels

**INSTALLATION**

Mount unit in wall recess using four (4) #10 self-threading screws (by others) through concealed mounting holes provided. For compliance with 2010 ADA Accessibility Standards install unit so that centerline of towel dispenser slot is 48" [1219] maximum above finished floor (AFF). Note that top of RWO is 3/4" [19] below top of unit. Typical suggested mounting height is 42" [1067] from bottom of unit AFF.

Rough Wall Opening (RWO) required is 11-1/4" [286] W x 15-3/4" [400] H x 4-1/4" [102] D minimum

**WARRANTY**

One (1) Year from date of Invoice