


**Profile Collection Paper Towel Dispenser (800 Multi - 600 C-Fold - 1100 Single-Fold) and Waste Receptacle (8 gal.) – Recessed**

Paper Towel Combination Units

Profile

MasterFormat Section 10 28 13

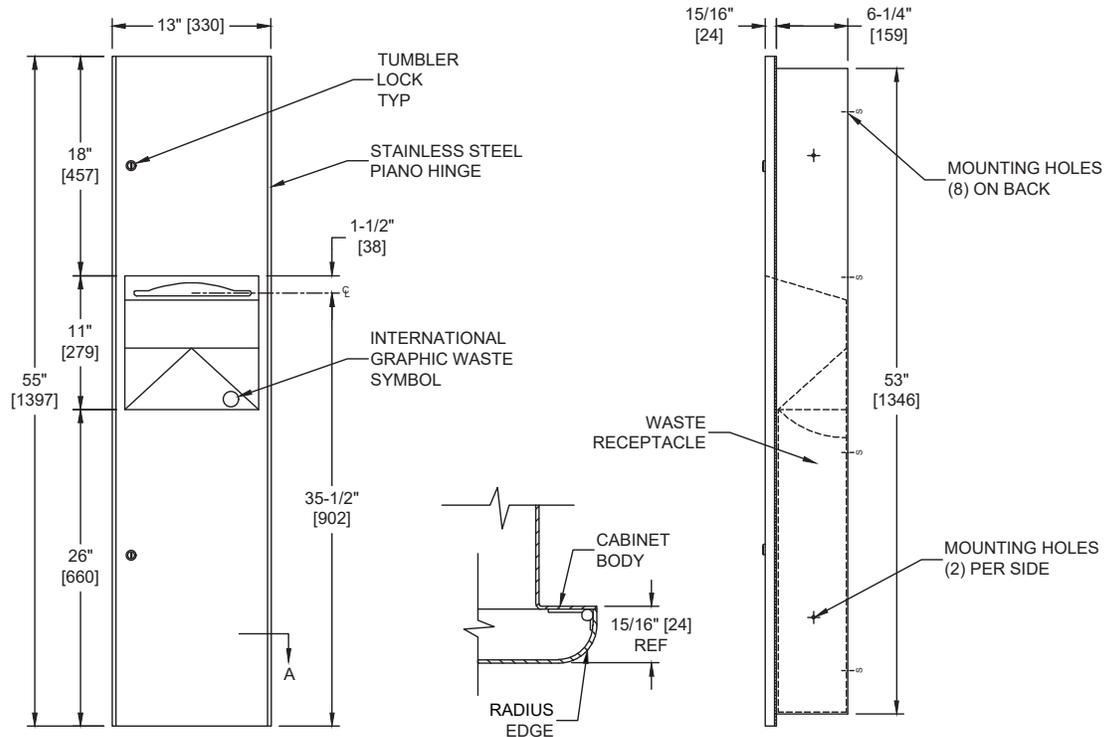

Scan for Information



**SUSTAINABILITY/LEED**

MR 4.1 (1) EQ 4.1 (1)  
MR 4.2 (1) EQ 4.2 (1)  
MR 6 (1) EQ 4.4 (1)

**NOTE:**  
ALL DIM'S INCH [MM]  
ILLUSTRATION FOR REF ONLY AND NTS  
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN  
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

**PRODUCT OVERVIEW**

Dispenses 600 C-fold or 800 multi-fold or 1100 single-fold towels and has push door and 8 gal. (30 L) capacity. Paper towels are manually withdrawn through dispensing slot. A towel adapter (provided) allows alternating between single-fold, C-fold and multi-fold dispensing at time of loading for a single type per load and ensures that towels feed properly until depleted. Unit will continue to feed properly when reloaded with a partial load in place. Refill dispenser by unlocking door and replacing towels for an empty or partially empty unit. Dispenser supply is replenished and waste container is emptied manually on cycles determined by maintenance needs. Locking full-face door over compartments prevents unauthorized access or removal.

**KEY FEATURES & SPECIFICATIONS**

- Robust 16 gauge Stainless Steel door
- Curved (radius) vertical door and waste receptacle edges add elegance
- Type 304 Stainless Steel - Satin Finish
- Recessed
- 600 C-Fold or 800 Multi-Fold OR 1100 Single-Fold / 8.0 Gal. (30.0 L) Waste Capacity

**OPERATION & MAINTENANCE**

Paper towels are manually withdrawn through dispensing slot. A towel adapter (provided) allows alternating between singlefold, C-fold and multi-fold dispensing at time of loading for a single type per load and ensures that towels feed properly until depleted. Unit will continue to feed properly when reloaded with a partial load in place. Refill dispenser by unlocking door and replacing towels for an empty or partially empty unit. Dispenser supply is replenished and waste container is emptied manually on cycles determined by maintenance needs. Locking full-face door over compartments prevents unauthorized access or removal.

**TECHNICAL INFORMATION / PRODUCT PROPERTIES**

Property	Value
Dimensions	13" [330] W x 55" [1397] H x 7-3/16" [183] D
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Recessed
Capacity	600 C-Fold or 800 Multi-Fold OR 1100 Single-Fold / 8.0 Gal. (30.0 L) Waste Capacity

**INSTALLATION**

Mount unit in wall recess with #10 self-threading screws (by others) through concealed mounting holes provided. For compliance with ICC/ANSI A-117.1-2003 and 2010 ADA Accessibility Standards install unit with centerline of towel dispenser slot 48" [1219] maximum Above Finish Floor (AFF). Note that top of Rough Wall Opening (RWO) is 3/4" [19] below top of unit. For general utility install unit with centerline of towel dispenser slot between 49" [1245] and 56" [1422] AFF.

Rough Wall Opening (RWO) required is 11-1/2" [292] W x 53-1/2" [1359] H x 6-1/4" [159] D minimum

**WARRANTY**

One (1) Year from date of Invoice