




AMERICAN SPECIALTIES, INC.
441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: B-24

ISSUED: 5-05

REVISED:

REPLACEMENT SIGHT GAGE

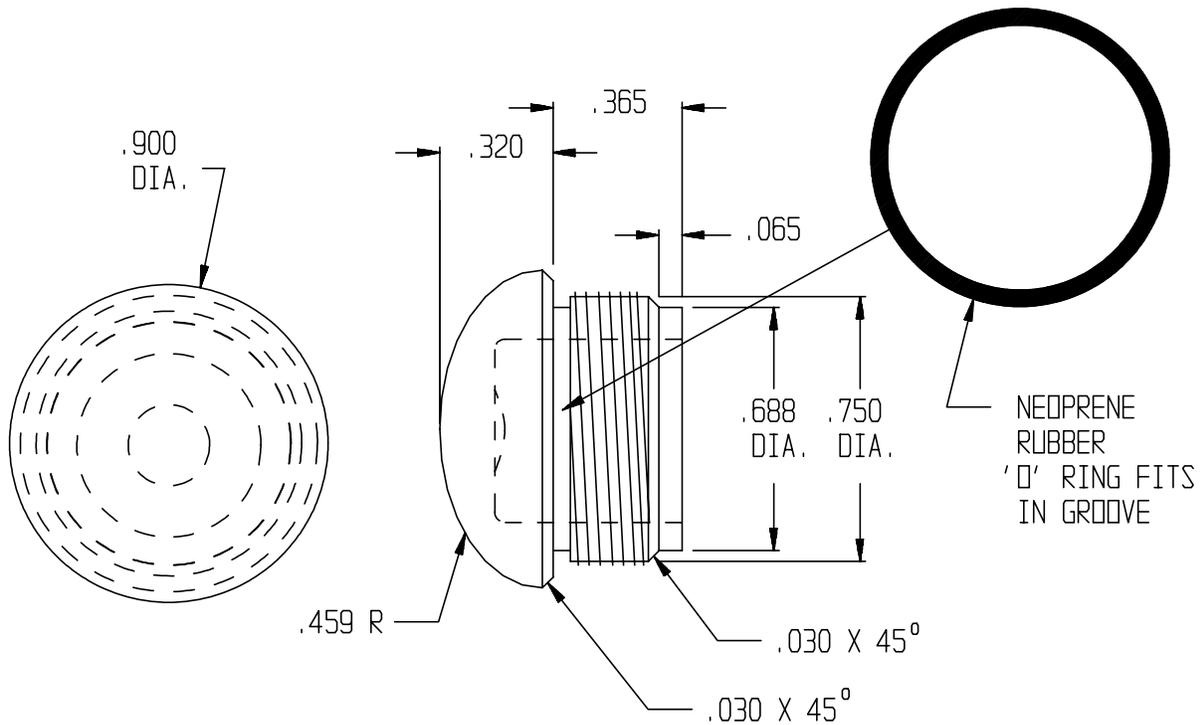

SPECIFICATION

Replacement sight gage shall allow service personnel to view level of liquid in dispenser. Threads molded onto body shall be compatible with 3/4-28 UNEF-2B threaded tanks and tanks requiring a seal nut for retention. Sight gage shall be high impact resistant plastic and shall be compatible with all soaps, lotions or detergents suitable for the dispenser application, including those containing antimicrobial agents such as PCMX or Triclosan. Sight gage is furnished with an O-ring for leak free installation.

Replacement Sight Gage shall be Model N° B-24 of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

Gage is fastened into soap dispensing tank either by hand tightening into threaded hole or by tightening seal hex nut on inside of tank to slightly compress O-ring. Always use new O-ring supplied with the B-24 for leak free installation. O-ring should be lubricated with liquid soap to prevent tearing during installation. Sight gage will fit into threaded hole of soap dispensers Model N°'s 0342, 0343, 0346, 9342, and plain hole of soap dispensers Model N°'s 0325, 0326, 0327, 0431, 6326, 9326.

OPERATION

Level of liquid contained in tank is visibly observed through sight gage to allow replenishment when level is low prior to complete depletion. When coupled with a regular service and preventative maintenance program the sight gage helps facility managers to always satisfy users needs with regard to soap dispenser performance.