
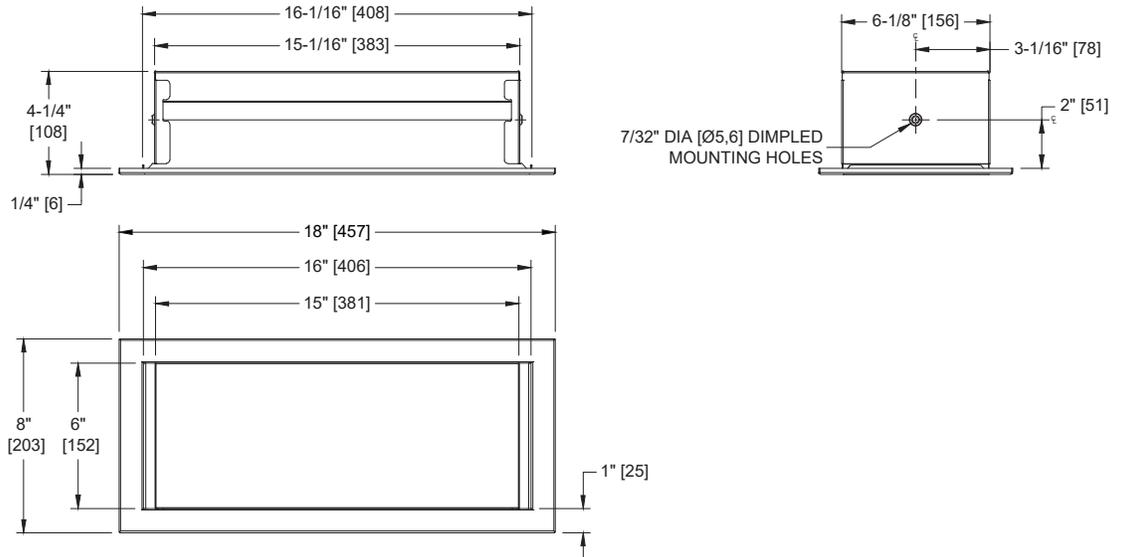


Shelf – Recessed

Shelves

MasterFormat Section 10 28 13

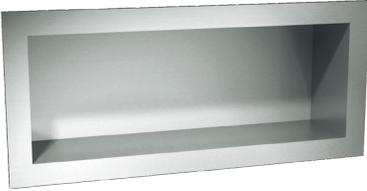

Scan for Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

This unit is fabricated of 22 gauge, spot welded construction, stainless steel with a satin finish.

KEY FEATURES & SPECIFICATIONS

- Type 304 Stainless Steel - Satin Finish
- Recessed

OPERATION & MAINTENANCE

Shelf is stationary after installation and has no moving parts. User manually places and retrieves items onto and from shelf. See PCM on ASI Website for Product Care, Cleaning & Maintenance.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	18" [457] W x 8" [203] H x 4-1/4" [108] D
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Recessed

INSTALLATION

Recess mount unit in wall using two (2) #10 x 1-1/2" [M5x38] flat or oval-head self-threading screws (by others) through concealed dimpled mounting holes provided. Create Rough Wall Opening (RWO) 1/8" [3] larger than frame opening on sides and 1/4" [6] on top and bottom for leveling. Supply (by others) appropriate shims to accommodate side space for ramped entry side walls and to support sides when installed. For general usability install shelf 50" [1270] maximum Above Finished Floor (AFF). For compliance with 2010 ADA Accessibility Standards, ANSI 117.1 and 2015 ABA Standards install unit so that top of shelf opening is 48" [1219] max AFF with clear floor reach access provided or 46" [1168] max AFF with side reach access provided over an obstruction (e.g. vanity). Rough Wall Opening (RWO) required is 16-5/16" [414] W x 6-5/8" [168] H x 4" [102] D minimum

SCHEDULE OF AVAILABILITY

Shelf can be made in any length up to 84" [2134] OA maximum. Heights can be made up to 42" [1067] OA maximum. Indicate Length x Height (XX xYY) required for Model #0412-M-XXYY

WARRANTY

One (1) Year from date of Invoice