
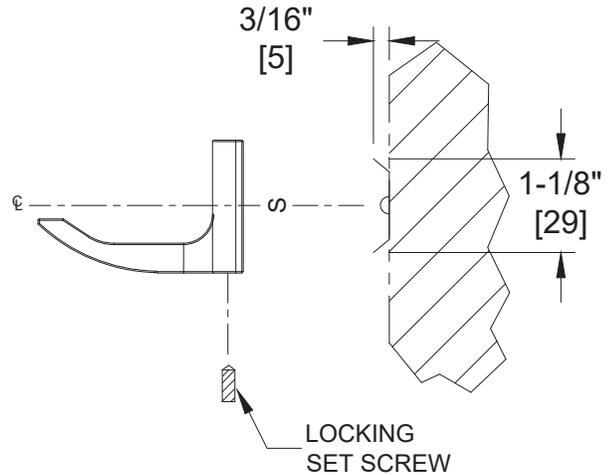

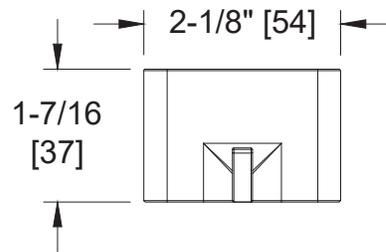


Robe Hook (Single) – Surface Mounted, Chrome Plated Zamak

Specialty Accessories

MasterFormat Section 10 28 13



Scan for Information



SUSTAINABILITY/LEED

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Fabricated from rust resistant Zamak, with stainless steel wall bracket. One stainless steel hex socket set screw is provided along base of flange for anchoring to stainless steel wall bracket.

KEY FEATURES & SPECIFICATIONS

- Single Hook
- Chrome Plated Zamak
- Surface Mounted

OPERATION & MAINTENANCE

Washroom accessory products require regular surface cleaning, much the same as stainless steel sinks, pots and pans, and eating utensils. As long as a regular cleaning schedule is followed, the best method is cleaning with a soft clean rag moistened with a mild detergent, followed by a water-moistened clean rag and then a dry rag.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	2-1/8" [54] W x 1-7/16" [37] H x 2-1/8" [54] D
Construction	Chrome Plated Zamac
Mounting	Surface Mounted
Capacity	N/A

INSTALLATION

Wall bracket is surface mounted using #10 self-threading screws (supplied) through holes provided. Hook is secured to bracket by tightening stainless steel hex socket set screw. Typical mounting suggestion is 66" [1676] Above Finished Floor (AFF). For compliance with 2010 ADA Accessibility Standards, unit should be installed so that top of hook is 54" [1372] maximum AFF if clear floor side reach access is provided or 48" [1219] max AFF if clear floor forward reach access is provided.

ADDITIONAL INFORMATION

N/A

WARRANTY

One (1) Year from date of Invoice