


**Recessed Soap Dish – Chase Mount**

Security Accessories

MasterFormat Section 10 28 13

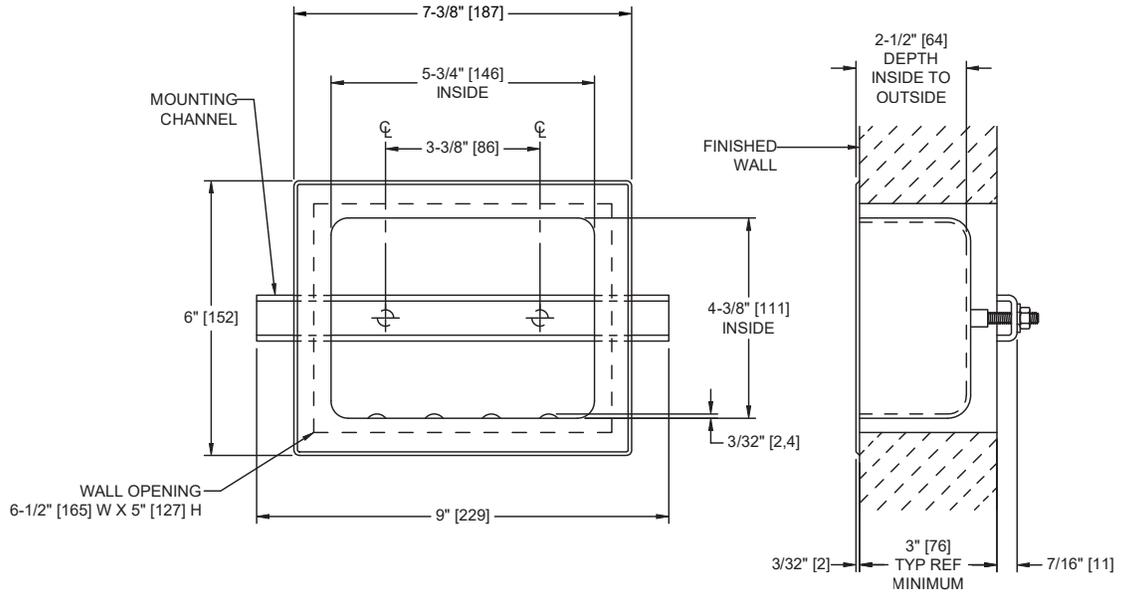

Scan for Information



**SUSTAINABILITY/LEED**

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)  
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

**NOTE:**  
ALL DIM'S INCH [MM]  
ILLUSTRATION FOR REF ONLY AND NTS

**PRODUCT OVERVIEW**

Soap dish 16 gauge stainless steel type 304 with satin finish. One piece drawn construction with beveled trim and embossments for air circulation and drainage. Unit has two "T" nuts welded on back for rear mounting.

**KEY FEATURES & SPECIFICATIONS**

- Security
- Recessed - Chase (Rear) Mount

**OPERATION & MAINTENANCE**

Soap is stored in the interior of the dish on raised dimples that allow water to drain away and provide a gripping surface to retain soap.

**TECHNICAL INFORMATION / PRODUCT PROPERTIES**

Property	Value
Dimensions	7-3/8" x 6" x 3" [187 x 152 x 76]
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Recessed - Chase (Rear) Mount
Capacity	

**INSTALLATION**

For compliance with ADA Accessibility Guidelines, install unit so that soap dish is 48" [1219] maximum Above Finished Floor (AFF) in showers or 36" [914] maximum AFF in bathtubs or 46" [1168] maximum AFF if side reach access over an obstruction (e.g. vanity) is only provided or 44" [1118] maximum AFF if forward reach access over vanity basin is provided. Recess mount unit through wall opening and secure to finished wall with washers and nuts (supplied). Rough Wall Opening (RWO) required is 6-1/2" W x 5" H x 2-3/4" D minimum [165 x 127 x 70]

**ADDITIONAL INFORMATION**

**WARRANTY**

One (1) Year from date of Invoice